

# AGILE

GAMING SERIES



# DESKTOP CASING

## FALCON

ITX, Micro ATX, ATX, E-ATX



**Material** : ABS + Glass; 0.6mm SPCC Red/White  
4mm Tempered Glass Side panel  
**Exp. Slot** : 7  
**Drive Bays** : 3+2 or 4+1  
**Front I/O** : Power Button; Reset Button  
3 USB(2 x 3.0); HD Audio  
**Fan Size** : 140/120 F: 2/3 R:1 T:1  
**Liquid** : F:240/280/360  
T: 240/280  
R: 120mm

**Includes**  
**Front** :  
120 RGB Fan 3pcs  
**Rear** :  
120 RGB Fan 1pc.

## FRIEDEN

ITX, Micro ATX, ATX



**Material** : ABS; 0.5mm SPCC;  
White Int.;  
4mm T.G. Side panel  
**Exp. Slot** : 7  
**Drive Bays** : 2+2  
**Front I/O** : Power ; Reset  
3 USB(2 x 2.0); HD Audio  
**Fan Size** : 140/120mm F: 3/2  
R:1(120) T:2(120)

## MINOKAWA

ITX, Micro ATX, ATX



**Material** : ABS; 0.5mm SPCC  
Black Int.;  
4mm T.G. Side panel  
**Exp. Slot** : 7  
**Drive Bays** : 2+2  
**Front I/O** : Power; Reset; LED;  
3 USB(2x2.0); HD Audio  
**Fan Size** : 140/120mm  
F: 3/2 R:1(120)

## EOSTRIX

ITX, Micro ATX, ATX



**Material** : ABS; 0.5mm SPCC  
Black Int.;  
4mm T.G. Side panel  
**Exp. Slot** : 7  
**Drive Bays** : 2+2  
**Front I/O** : Power; Reset; LED;  
3 USB(2x2.0); HD Audio  
**Fan Size** : 120mm  
F: 3 T:2 R:1 PSU:2

## EAGLE WARRIOR

ITX, Micro ATX, ATX, E-ATX



**Material** : ABS + Glass;  
0.6mm SPCC Black Int.  
4mm Tempered Glass Side panel  
**Exp. Slot** : 7  
**Drive Bays** : 3+2 or 4+1  
**Front I/O** : Power Button; Reset Button  
3 USB(2 x 3.0); HD Audio  
**Fan Size** : 140/120 F: 2/3 R:1 T:1  
**Liquid** : F:240/280/360  
T: 240/280 R: 120mm

**Includes**  
**Front** :  
120 RGB Fan 3pcs  
**Rear** :  
120 RGB Fan 1pc.

## TURDUS

ITX, Micro ATX, ATX



**Material** : ABS; 0.5mm SPCC  
Black Int.; 4mm T.G. Side panel  
**Exp. Slot** : 7  
**Drive Bays** : 2+2  
**Front I/O** : Power; Reset; LED;  
3 USB(2x2.0); HD Audio  
**Fan Size** : 120mm  
F: 3/2 T:2 R:1

## PERYTON

ITX, Micro ATX, ATX



**Material** : ABS; 0.3mm SPCC  
Black Int.; 4mm T.G. Side panel  
**Exp. Slot** : 7  
**Drive Bays** : 1+2  
**Front I/O** : Power; Reset; LED;  
3 USB(2x2.0); HD Audio  
**Fan Size** : 120mm  
F: 3 T:2 R:1  
**Liquid** : 120 mm  
F:1 R:1


## BLAKISTON

ITX, Micro ATX, ATX, DOUBLE CHAMBER



**Material** : SPCC White/Black Int.;  
6mm;  
Tempered Glass  
**Exp. Slot** : 4  
**Drive Bays** : 2+2 or 1+3  
**Front I/O** : Power Button; Reset Button  
LED Button; 3 USB(1 x 3.0); HD Audio  
**Fan Size** : 120mm  
M/B: 2 T:2 R:1  
**Liquid** : T:240 R:120mm

## GAMING TABLE

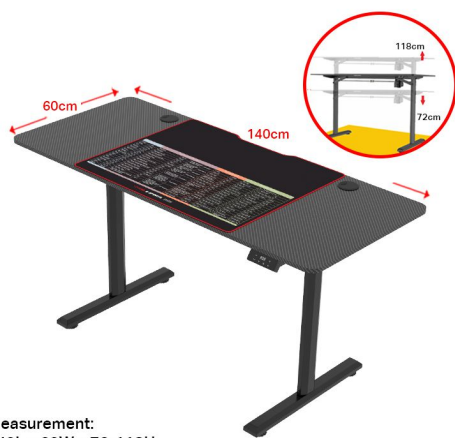

Measurement:  
140L x 60W x 72-118H  
(Adjustable Height)


- Electric Height Adjustable
- Carbon Steel Legs
- Carbon Fiber Design
- Free Gaming Mouse Pad

## ESPORTS GAMING BUNDLE

### GM510

eSPORTS 5-IN-1 GAMING BUNDLE

MOUSEPAD

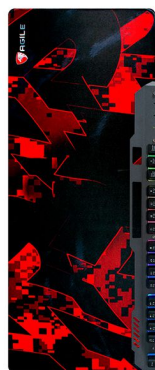

RAINBOW LED  
KEYBOARD



RAINBOW LED  
MOUSE

RAINBOW LED  
HEADSET



HEADSET  
STAND

## GAMING POWERSUPPLY

### GE-750 (ATX)

RGB FAN : 12cm  
20+4pin : Yes  
4+4pin for CPU : Yes  
6+2pin PCI E connector: 2  
SATA : 4  
HDD/Molex : 2



### GE-650 (ATX)

RGB FAN : 12cm  
20+4pin : Yes  
4+4pin for CPU : Yes  
6+2pin PCI E connector: 2  
SATA : 4  
HDD/Molex : 2



### GE-500 (ATX)

RGB FAN : 12cm  
20+4pin : Yes  
4+4pin for CPU : Yes  
6+2pin PCI E connector: 2  
SATA : 4  
HDD/Molex : 2



Philippine Distributor:

**PHITEQ**  
ENTERPRISE INC.

Authorized Reseller:



## DATA CABINET

Available : 6U - 42U



- Color: Black or Grey
- Front door: Tempered glass;
- Rear door: metal
- Mounting profile: 2.0mm ;
- Horizontal Beam: 1.2mm
- Front/rear/top/frame: 1.2mm ;
- Side Panel: 1.0mm



- Color: Black or Grey
- Front Door: Tempered glass ;
- Rear Door: Metal
- Reliable 19" international structure, single section
- Removable side panels with plastic fasteners for easy operation, lock is for options

## ATX CASING

### G1603



Include  
700W Powersupply

M/B FF : ITX, Micro ATX, ATX  
Materials: 0.4mm SPCC;  
ABS Front Panel  
Exp. Slot : 7 Drive Bays: 3.5 x 2; 2.5 x 1  
Front I/O : Power Button; Reset Button;  
USB1.0 x 2; Mic; HD Audio  
Fan Size : 120mm F: 3 R: 1

### CHALLENGER



Include  
700W Powersupply

M/B FF : Micro ATX, ATX  
Materials: 0.4mm SPCC; ABS Front Panel  
Exp. Slot : 7  
Drive Bays: Ext. 5.25 x 1; 3.5 x 1  
Int. 3.5 hdd x 2; 2.5 x 1  
Front I/O : Power Button; Reset Button;  
USB1.0 x 2; Mic; HD Audio  
Fan Size : 120mm F: 2 R: 1 S: 1

## SLIM CASING

### Q5



Include  
600W Powersupply

M/B Form Factor: Micro ATX, ATX  
Materials : 0.5mm SECC;  
Steel Side Panel  
Expansion Slot : 4 Drive Bays:  
3.5 hdd x 1; 2.5 x 1; DVD Bays  
Front I/O : Power Button;  
USB2.0 x 2; Mic; HD Audio

## MICRO ATX CASING

### M109



Include  
700W Powersupply

M/B FF : Micro ATX, ITX  
Materials: 0.4mm SPCC; Black interior  
ABS Front Panel  
Exp. Slot : 4  
Drive Bays: 3.5 x 2; 2.5 x 1  
Front I/O : Power Button; Reset Button;  
3 USB (2 x 2.0); HD Audio  
Fan Size : 120mm F: 2 R: 1

### M173-3BB



Include  
700W Powersupply

M/B FF : Micro ATX, ATX  
Materials: 0.4mm SPCC; ABS Front  
Metal Side Panel  
Exp. Slot : 4  
Drive Bays: Ext. 5.25 x 1; 3.5 x 1  
Int. 3.5 x 2; 2.5 x 1  
Front I/O : Power Button; Reset Button;  
3 USB (2 x 2.0); HD Audio  
Fan Size : 120mm F: 2 S: 1 R: 1 (80mm)

### V200



M/B FF : Micro ATX, ITX  
Materials: 0.4mm SPCC; ABS Front  
Metal Side Panel  
Exp. Slot : 4  
Drive Bays: 3.5 x 2; 2.5 x 2  
Front I/O : Power Button; Reset Button;  
(2 x USB2.0); HD Audio  
Fan Size : 80mm R: 1

### V200



M/B FF : Micro ATX, ITX  
Materials: 0.4mm SPCC; ABS Front  
Metal Side Panel  
Exp. Slot : 4  
Drive Bays: 3.5 x 2; 2.5 x 2  
Front I/O : Power Button; Reset Button;  
(2 x USB2.0); HD Audio  
Fan Size : 80mm R: 1

## POWERSUPPLY

### P800

ATX Powersupply



- FAN: 12cm
- SATA: 2
- 20+4pin: Yes
- HDD/Molex: 2
- 4pin for CPU: Yes
- 4 pin for Floppy: 1

### P700

ATX Powersupply



- FAN: 12cm
- SATA: 2
- 20+4pin: Yes
- HDD/Molex: 2
- 4pin for CPU: Yes
- 4 pin for Floppy: 1

### PM-600

Micro ATX Powersupply



- FAN: 12cm
- SATA: 2
- 20+4pin: Yes
- HDD/Molex: 2
- 4pin for CPU: Yes
- 4 pin for Floppy: 1

## WEBCAM

### 812H



- 1/2.9 2MP
- 0.5-2.5meters
- 3.6mm.
- MJPG,h.264, YUV2
- 1020x1080
- 30 FPS
- Built-in Microphone
- 2.5meters
- PCM
- 33kbp
- USB direct power

## RACKMOUNT CASING

### DVR-4U

ATX PSU



Support E-ATX 12" X13" Motherboard  
Drive Configuration:  
8X3.5" HDD + 2X5.25" CD-ROM  
Fan: 4X8025 fans in the front  
*\*Case Only*

## UTP CABLE

### CAT 6 Outdoor



- 305m
- 24AWG .45 CCA\* Pairs
- Copper Clad Aluminum
- Black

### CAT 6



- 305m and 100m available
- 24AWG .45 CCA\* Pairs
- Copper Clad Aluminum
- Blue

### CAT 5e



- 305m and 100m available
- 24AWG .45 CCA\* Pairs
- Copper Clad Aluminum
- White


## CCTV POWERSUPPLY

### 18CH 12V 30A



- Switching power supply module,
- The output terminal with multiple sets of terminals
- Easy field installation and commissioning
- Up to 30ch; DC12V 30A
- (1 year warranty)

### 18CH 12V 20A



- Switching power supply module,
- The output terminal with multiple sets of terminals
- Easy field installation and commissioning
- Up to 18ch; DC12V 20A
- (1 year warranty)

### 9CH 12V 10A



- Switching power supply module,
- The output terminal with multiple sets of terminals
- Easy field installation and commissioning
- Up to 9ch; DC12V 10A
- (1 year warranty)

## AUTOMATIC VOLTAGE REGULATOR

### AVR-1200F



- Power - 1200W
- Input Voltage - 160-260V
- Output Voltage - 220Vac
- Frequency - 60Hz
- Delay Time - 6 secs/ 3mins.  
(other brand 3secs./3mins.)

### AVR-1000F



- Power - 1000W
- Input Voltage - 160-260V
- Output Voltage - 220Vac
- Frequency - 60Hz
- Delay Time - 6 secs/ 3mins.  
(other brand 3secs./3mins.)

### AVR-300



- Power - 300W
- Input Voltage - 180-260V
- Output Voltage - 220Vac
- Delay Time - 6 secs/ 3mins.  
(other brand 3secs./3mins.)

Philippine Distributor:

**PHITEQ**  
ENTERPRISE INC.

Authorized Reseller: